

## Specifications

### 备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor,lu"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

## 2. 特性 (characteristics):

额定电流: 1 AMP

Ringing Current: 1 AMP

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M $\Omega$  MIN.



### Insulating Resistance

耐电压: AC 500V.

### Withstanding Voltages

温度范围:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$



Temperature Range: -40°C

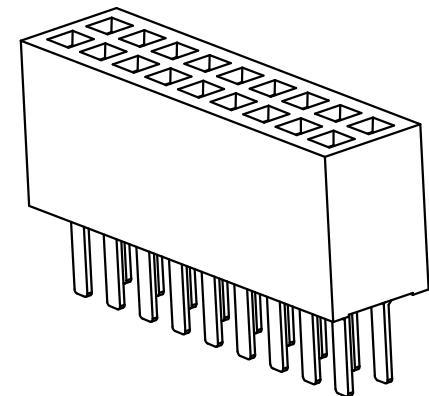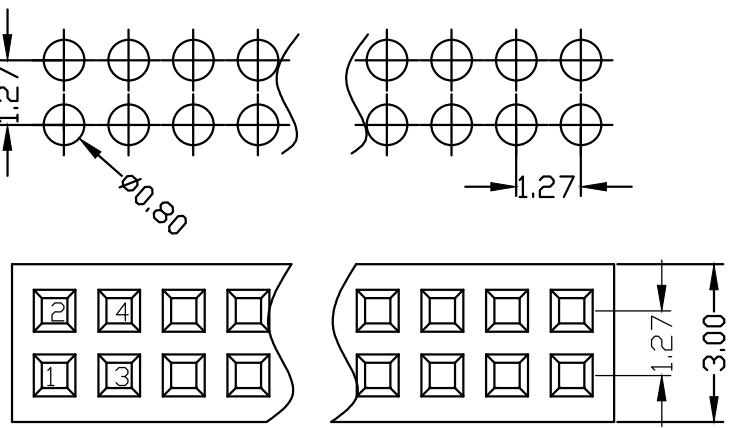

## Ordering Information

B0343-12 XX XX X AU X 1

NO. OF PINS PER ROW	CONTACT Full Of Gold G0=0.8u"	PLATING Semi-gold G1=1u"	INSULATOR MATERIAL: 1:PBT 2:PA46 3:PA66 4:PA6T 5:PA9T 6:LCP 7:	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
2~50P	G2=1.5u"	L2=1.5u"	3:PA66	
	G3=2u"	L3=2U"	4:PA6T	
	G4=3u"	L4=3U"	5:PA9T	
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"		
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high tempreature Matt tin			

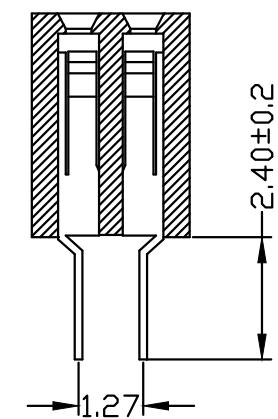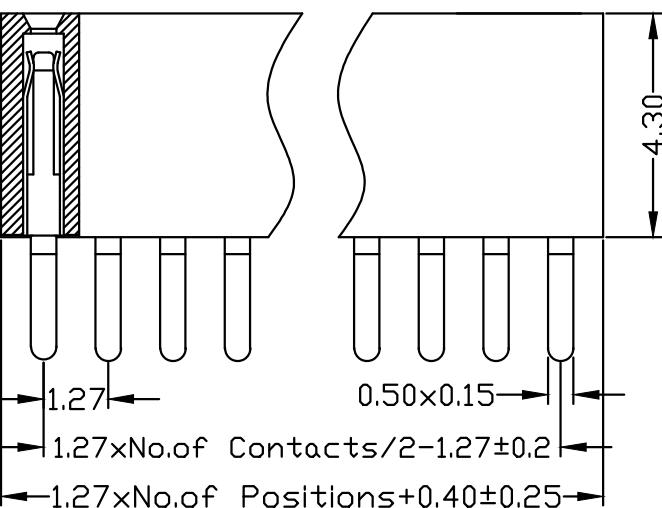

**JIANGJI**® 苏州江基电子科技有限公司  
SuZhou JiangJi Electronic Technology CO. LTD

H	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ. 	APPROVE	Customer No.	OPERATION		SCALE		Fit		JIANGJI® 苏州江基电子科技有限公司			
											X.X	±0.25	UNIT		MM		SuZhou JiangJi Electronic Technology CO. LTD			
											X.XX	±0.20	SIZE		A4		DESIGN		PART NO.	
											X.XXX	±0.10	SHEET		1/1		CHECK		TITLE:	
											Angle	±3°	PROJ. 		APPROVE		Customer No.		1. 27mm 双排母 塑高4.3 180度 U型	
											1	2	3	4	5	6	7	8	9	10