

1 2 3 4 5 6 7 8 9 10

# Specifications

## A 备注(Remark)

### 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30μ MIN, 表面镀金μ MIN

Contact: Phosphor, μ MIN GOLD PLATING OVER ALL  
30μ MIN NICKEL UNDERPLATING OVER ALL

### 2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

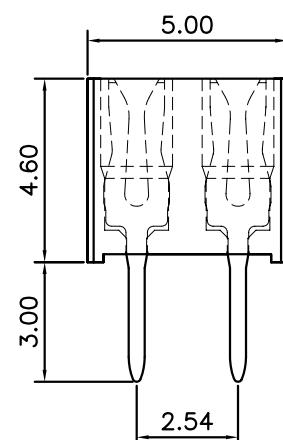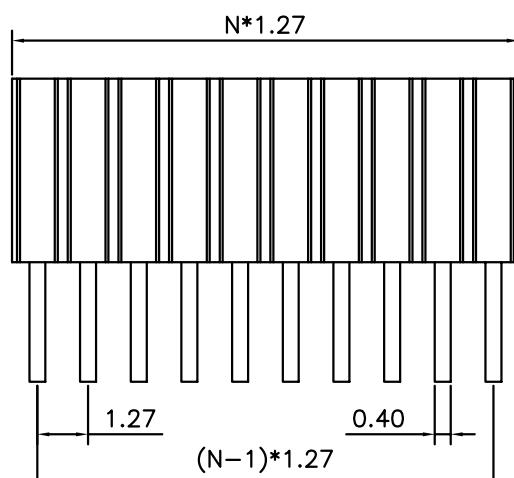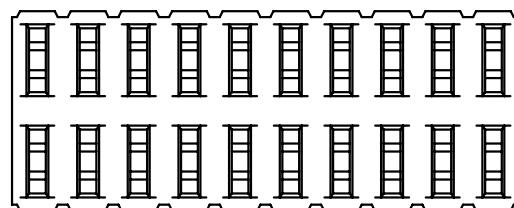

## D Ordering Information

B0346-12 XX XX X AY X 1

NO. OF PINS PER ROW	Contact	Plating	INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL: 1:PBT	A:PE Bag

G0=0.8u"	L0=0.8u"	1:PA46	B:Tape & Reel
G1=1u"	L1=1u"	2:PA46	C:Tube
G2=1.5u"	L2=1.5u"	3:PA66	D:Tube+CAP
G3=2u"	L3=2u"	4:PA6T	E:Tray

G4=3u"	L4=3u"	5:PA9T	
G5=5u"	L5=5u"	6:LCP	
G6=10u"	L6=10u"	7:	

G7=15u"	L7=15u"		
G8=20u"	L8=20u"		
G9=30u"	L9=30u"		

T1=Ordinary Tin Plated			
T2=Matte Tin Plated			
T3=Tin-plated High-temperature			

T4=high temperture Matt tin			
-----------------------------	--	--	--

					OPERATION		SCALE		Fit		JIANGJI® 苏州江基电子科技有限公司 SuZhou JiangJi Electronic Technology CO. LTD				
					X.X	±0.25	UNIT	MM	SIZE	A4	DESIGN				
H	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	SHEET		CHECK	TITLE:	Customer No.			
								1/1							
								PROJ.							
								APPROVE							

1 2 3 4 5 6 7 8 9 10