

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T + 30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T + 30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30μ"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, u"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperature Range: -40°C to+105°C

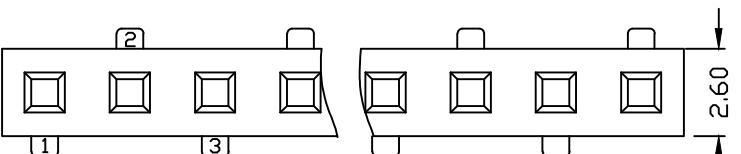


TYPE 1

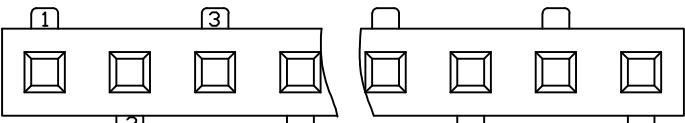



TYPE 2

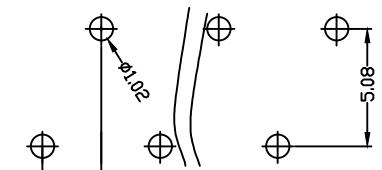

TYPE 1

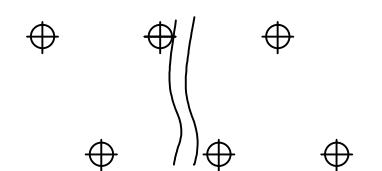

TYPE 2

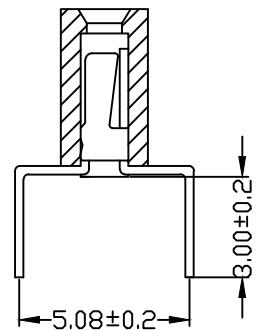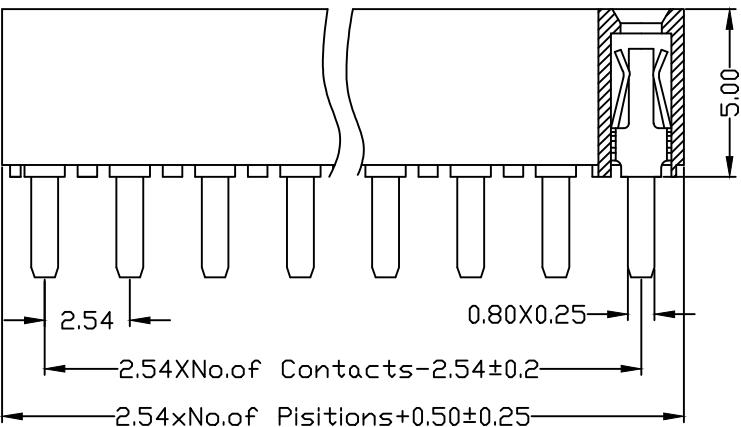

B Ordering Information

B0750-11 XX XX X GU X 2

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold	Semi-gold	
G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag
G1=1u"	L1=1U"	2:PA46	B:Tape & Reel
G2=1.5u"	L2=1.5U"	3:PA66	C:Tube
G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP
G4=3u"	L4=3U"	5:PA9T	E:Tray
G5=5u"	L5=5U"	6:LCP	
G6=10u"	L6=10U"	7:	
G7=15u"	L7=15U"		
G8=20u"	L8=20U"		
G9=30u"	L9=30U"		

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature

T4=high temperture Matt tin

苏州瀚牧锦电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	UNIT	MM	DESIGN	SIZE	A4	CHECK	PART NO.	TITLE:	Customer No.
					DIM	TOL	PROJ.	APPROVE										
1	2	3	4	5	X.X	±0.25												
					X.XX	±0.20												
					X.XXX	±0.10												
					Angle	±3°												
					SHEET	1/1												

1 2 3 4 5 6 7 8 9 10