

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30μ"MIN, 表面镀金μ"MIN

Contact: Phosphor, μ"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

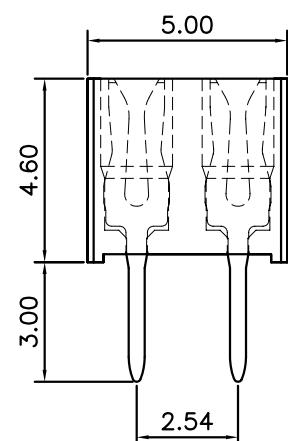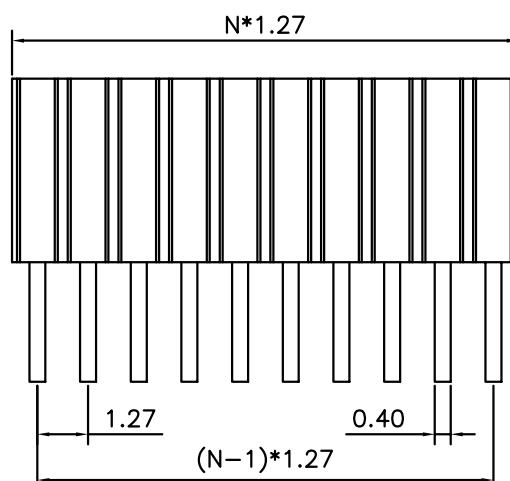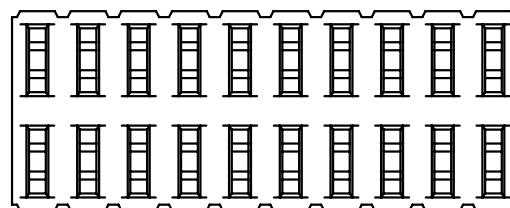

D Ordering Information

B0346-12 XX XX X AY X 1

NO. OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
2~50P	G0=0.8u"	L0=0.8u"	1:PBT	A:PE Bag
	G1=1u"	L1=1u"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5u"	3:PA66	C:Tube
	G3=2u"	L3=2u"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3u"	5:PA9T	E:Tray
	G5=5u"	L5=5u"	6:LCP	
	G6=10u"	L6=10u"	7:	
	G7=15u"	L7=15u"		
	G8=20u"	L8=20u"		
	G9=30u"	L9=30u"		

NO. OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
2~50P	G0=0.8u"	L0=0.8u"	1:PBT	A:PE Bag
	G1=1u"	L1=1u"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5u"	3:PA66	C:Tube
	G3=2u"	L3=2u"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3u"	5:PA9T	E:Tray
	G5=5u"	L5=5u"	6:LCP	
	G6=10u"	L6=10u"	7:	
	G7=15u"	L7=15u"		
	G8=20u"	L8=20u"		
	G9=30u"	L9=30u"		

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature

T4=high temperature Matt tin

					OPERATION		SCALE		Fit		SIZE	A4	DESIGN		PART NO.	TITLE:	Customer No.
					X.X	±0.25	UNIT		MM								
H					X.XX	±0.20											
					X.XXX	±0.10	Angle	±3°									
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	DIM	TOL										

苏州瀚牧锦电子有限公司

B0346-11XXXXAYX1

1 2 3 4 5 6 7 8 9 10