

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30μ"MIN, 表面镀金0.8μ"MIN

Contact: Phosphor bronze, 0.8μ"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性(characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C





Temperature Range: -40°C to +105°C

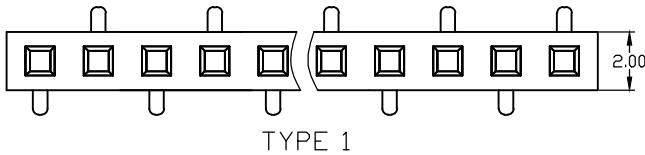

TYPE 1

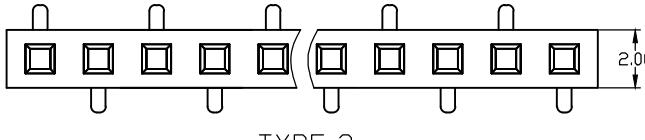

TYPE 2

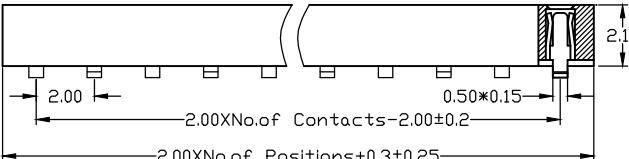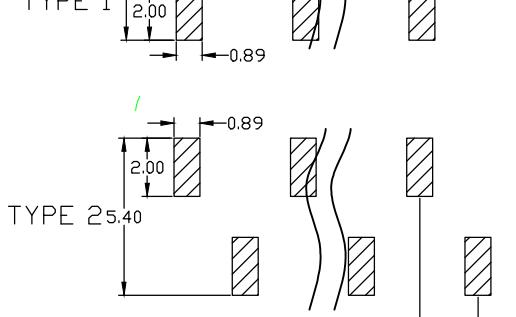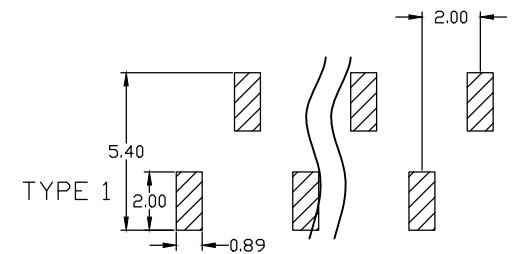

D Ordering Information

B0521-11 XX XX X CU X 1

NO. OF PINS	Contact Plating	INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:
2~50P	G0=0.8μ"	L0=0.8μ"	1:PBT
	G1=1μ"	L1=1μ"	2:PA46
	G2=1.5μ"	L2=1.5μ"	3:PA66
	G3=2μ"	L3=2μ"	4:PA6T
	G4=3μ"	L4=3μ"	5:PA9T
	G5=5μ"	L5=5μ"	6:LCP
	G6=10μ"	L6=10μ"	7:
	G7=15μ"	L7=15μ"	
	G8=20μ"	L8=20μ"	
	G9=30μ"	L9=30μ"	

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature

T4=high temperature Matt tin

苏州瀚牧锦电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		SIZE	A4	DESIGN	PART NO.
					DIM	TOL	UNIT	MM	MM	MM				
					X.X	±0.25								B0521-11XXXXCUX1
					X.XX	±0.20								
					X.XXX	±0.10								
					Angle	±3°								
					SHEET	1/1	CHECK							
					PROJ.	●	APPROVE							
					DIM	TOL								
					Customer No.									

1 2 3 4 5 6 7 8 9 10