




Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA9T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA9T+30%G. F UL94V-0, Color: Black
端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

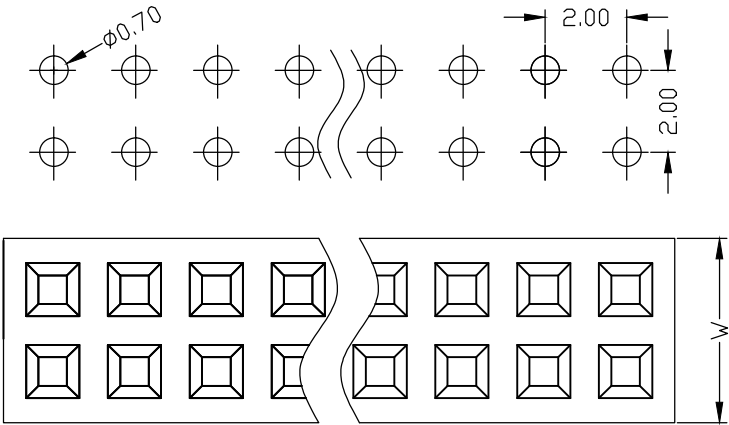

Ordering Information
B05XX-12 XX XX X FU X 1

NO.OF PINS	Contact Plating		INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
2"50P	G0=0.8u"	L0=0.8U"	1: PBT	B: Tape & Reel
	G1=1u"	L1=1U"	2: PA66	C: Tube
	G2=1.5u"	L2=1.5U"	3: PA66	D: Tube+CAP
	G3=2u"	L3=2U"	4: PA6T	E: Tray
	G4=3u"	L4=3U"	5: PA9T	
	G5=5u"	L5=5U"	6: LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3= Tin-plated High-temperature			
	T4=high temperture Matt tin			

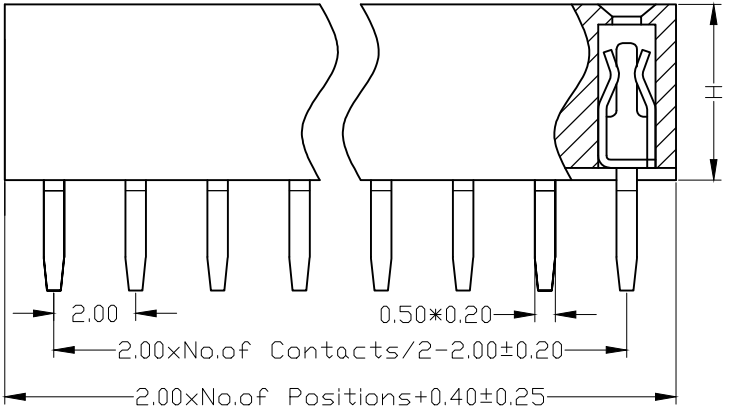

Dimension antitheses list					
ITEM	H			W	
Standard	4.0	4.3	4.6	4.5	
Alternate		常用			

						OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B05XX-12XXXXXFUX1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.00 双排母 2*xxP 180度 DIP:2.7	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		