

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T±30%G.F UI 94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0.Color: Black

端子：磷/青铜，镍底30μ”MIN 表面镀金10μ”MIN

Contact: Phosphor bronze,lu"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics)

额定电流: 2 AMP

Ringing Current: 2 AMP

接触阻抗: $20 \text{ m}\Omega \text{ MAX}$

Contact Resistance: 20

绝缘阻抗: 1000 M Ω MIN.



Insulating Resistance

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°

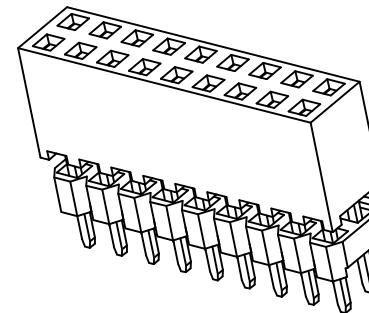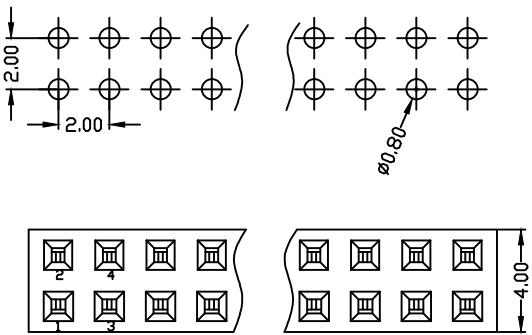

Ordering Information

B0563-22 XX XX X AY X 2



NO. OF PINS PER ROW	Contact Plating	INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL:
	G0=0.8u"	L0=0.8U"	1:PBT
	G1=1u"	L1=1U"	2:PA46
	G2=1.5u"	L2=1.5U"	3:PA66
	G3=2u"	L3=2U"	4:PA6T
	G4=3u"	L4=3U"	5:PA9T
	G5=5u"	L5=5U"	6:LCP
	G6=10u"	L6=10U"	7:
	"	"	E:Tray

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature

T4=high tempreature Matt time

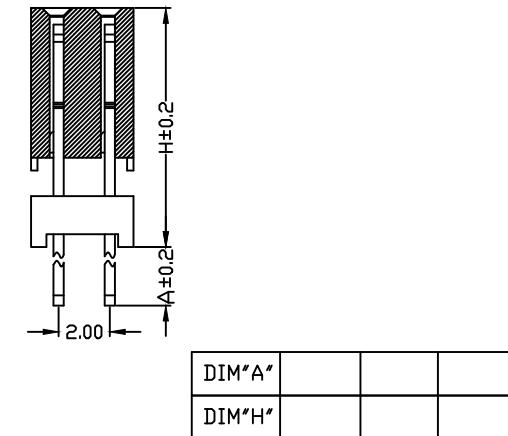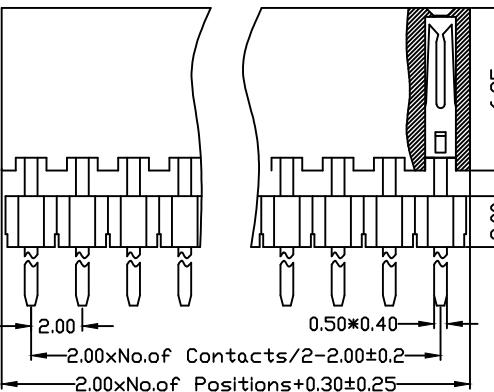

苏州瀚牧锦电子有限公司

				OPERATION		SCALE		Fit		苏州瀚牧锦电子有限公司			
H				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN				PART NO.	B0563-22XXXXAYX2
				X.XXX	±0.10							TITLE:	2.0*6.35排母 2*xxP 双排 180度 DIP2.5 Y型 加排针塑胶
				Angle	±3°			SHEET	1/1	CHECK			
		REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	
		1	2	3	4	5	6	7	8	9	10		