

1 2 3 4 5 6 7 8 9 10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperature Range: -40°C to +105°C

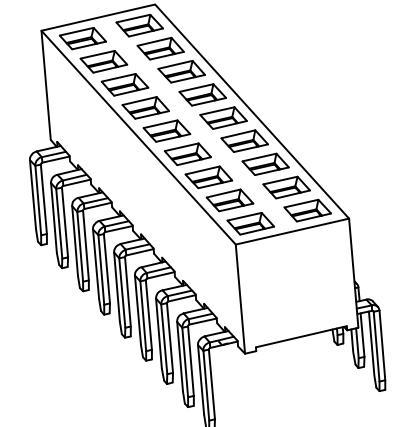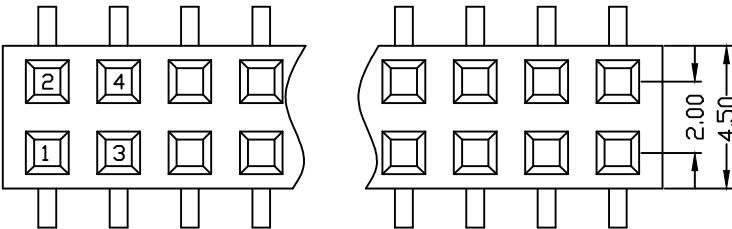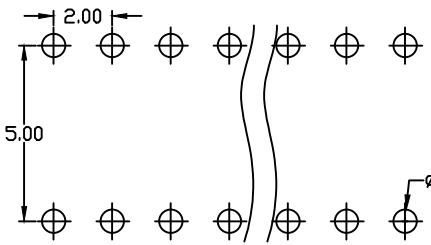

Ordering Information

B0543-12 XX XX X GU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold G0=0.8u"	1: PBT	A: PE Bag
	G1=1u"	2: PA46	B: Tape & Reel
	G2=1.5u"	3: PA66	C: Tube
	G3=2u"	4: PA6T	D: Tube+CAP
	G4=3u"	5: PA9T	E: Tray
	G5=5u"	6: LCP	
	G6=10u"	7:	
	G7=15u"		
	G8=20u"		
	G9=30u"		
	T1=Ordinary Tin Plated		
	T2=Matte Tin Plated		
	T3=Tin-plated High-temperature		
	T4=high temperture Matt tin		

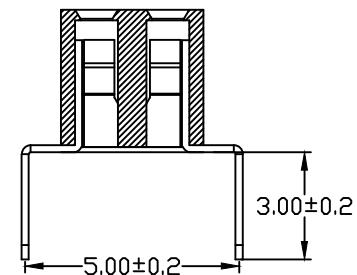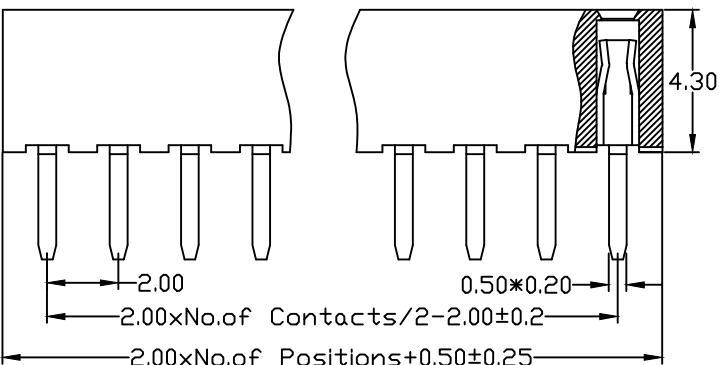

苏州瀚牧锦电子有限公司

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	UNIT	MM	DESIGN	SIZE	A4	CHECK	PART NO.	TITLE:	Customer No.
						DIM	TOL	PROJ.	APPROVE										
1	2	3	4	5	6	X.X	±0.25											B0543-12XXXXGU1	2.00mm双排母 塑高4.3 蜈蚣脚 脚距5.0 U型