
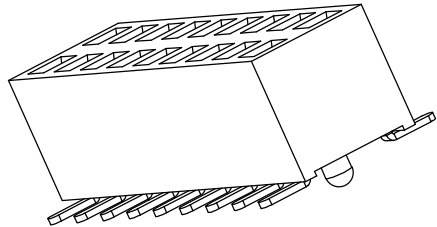
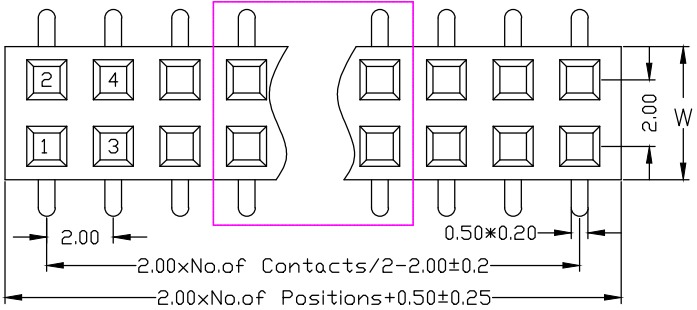





Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色:黑色.
Housing:PA6T+30%G. F UL94V-0, Color:Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact:Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current:2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40° C to+105° C
Temperature Range: -40° C to+105° C

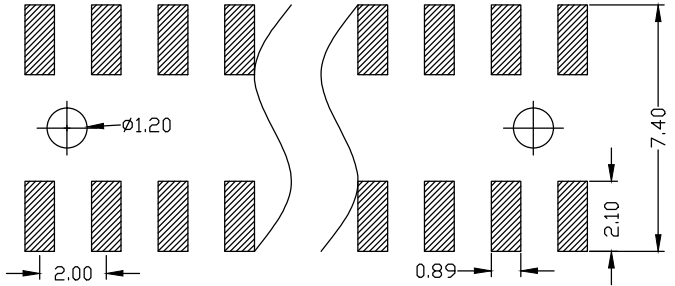

Ordering Information
B0543-12 XX XX X CU X 2

NO. OF PINS PER ROW	Contact Plating		INSULATOR	PACKING
	Full Of Gold	Semi-gold		
2~50P	G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag
	G1=1u"	L1=1U"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5U"	3:PA66	C:Tube
	G3=2u"	L3=2U"	4:PA6T	D:Tube+Cap
	G4=3u"	L4=3U"	5:PA9T	E:Tray
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

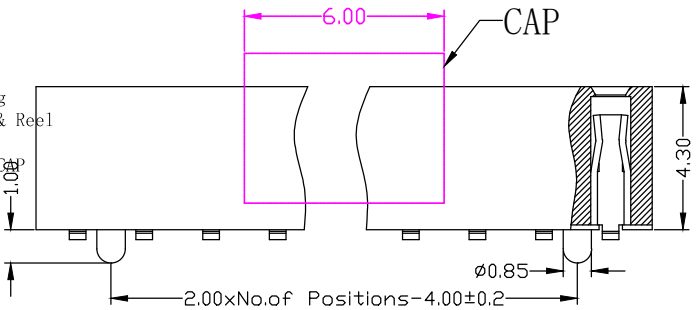

DIM"W"	4.5
--------	-----

				OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		B0543-12XXXXXCUX2	
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		2.00mm 双排母 塑高4.3 SMT 带柱 U型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE	Customer No.		
1		2	3	4	5	6	7	8	9	10		