

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black

端子：磷/青铜，镍底30μ"MIN,表面镀金10μ"MIN

Contact: Phosphor bronze, 18" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流：2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 m Ω MAX.

绝缘阻抗：1000 MΩ MIN.




Insulating Resistance: 1000 M Ω MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°

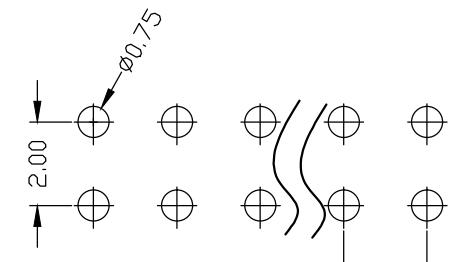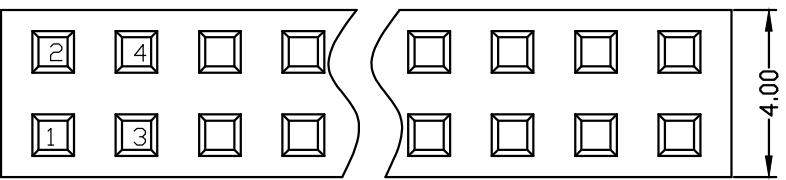

Ordering Information

B0520-12 XX XX X AU X 1

NO. OF PINS	Contact Plating	INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:
2~50P	G0=0.8u"	L0=0.8U"	1:PBT
	G1=1u"	L1=1U"	2:PA46
	G2=1.5u"	L2=1.5U"	3:PA66
	G3=2u"	L3=2U"	4:PA6T
	G4=3u"	L4=3U"	5:PA9T
	G5=5u"	L5=5U"	6:LCP
	G6=10u"	L6=10U"	7:
	G7=15u"	L7=15U"	
	G8=20u"	L8=20U"	
	G9=30u"	L9=30U"	
	T1=Ordinary Tin Plated		
	T2=Matte Tin Plated		
	T3=Tin-plated High-temperature		
	T4=high temperture Matt tin		

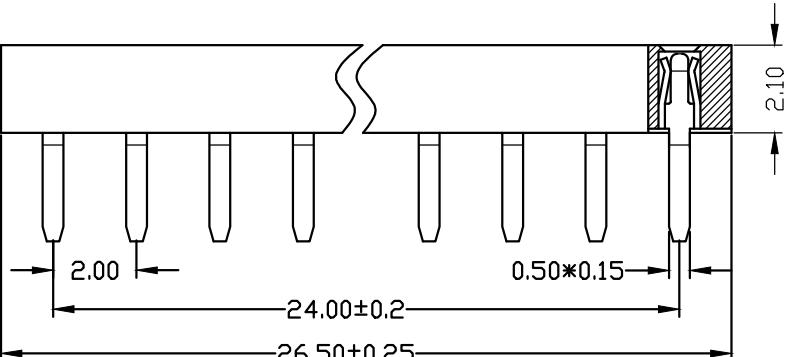

苏州瀚牧锦电子有限公司

				OPERATION		SCALE		Fit		苏州瀚牧锦电子有限公司			
				X.X	±0.25	UNIT		MM					
H				X.XX	±0.20	SIZE		A4		DESIGN			
				X.XXX	±0.10	SHEET		1/1		CHECK		PART NO.	
				Angle	±3°	PROJ.		APPROVE		TITLE:		B0520-12XXXXXAUX1	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE		DIM		TOL	
1		2		3		4		5		6		7	
8		9		10									